

PRODUCT SPECIFICATION

Type Of Module	SY-240WP	SY-60-250WP
Maximum Power (W)	240	250
Tolerance (%)	± 3%	± 3%
Open Circuit Voltage (V)	37.2	37.8
Short Circuit Current (A)	8.39	8.7
Maximum Power Voltage (V)	30.9	31.5
Maximum Power Current (A)	7.77	7.94
Module Efficiency (%)	14.7	15.3
Solar Cell Efficiency (%)	16.44	17.2
Series Fuse Rating (A)	15	15
Terminal Box	IP65	IP65
Maximum system voltage (V)	DC1000	DC1000
Operating Temperature(°C)	-40°C ---85°C	-40°C ---85°C



PRODUCT FEATURE


- Bypass diode minimizes the power drop by shade.
- White tempered glass ,EVA resin,weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof.Perfect for grid applications.
- Product guarantee 10 years.

Quality Assurance

- Electrical Insulation test
- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Damp heat test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test

Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

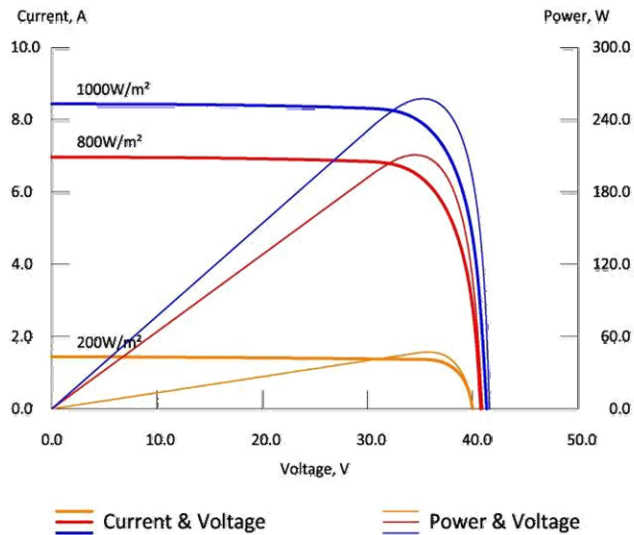

Electric Performance Typical Performance Characteristics		
Current Temperature Coefficient	%/°C	0.06
Voltage Temperature Coefficient	%/°C	-0.34
Power Temperature Coefficient	%/°C	-0.47
Performance Warranty : 90%output , 12 years 80%output, 25 years		

Physical Specifications

Dimension: 1650*992*45

Weight: 17KG/PCS


Packing : 2pcs in one carton

Loading Capacity:

216 pcs/ 20' Container

468 pcs/ 40' Container

572 pcs/ 40'HQ

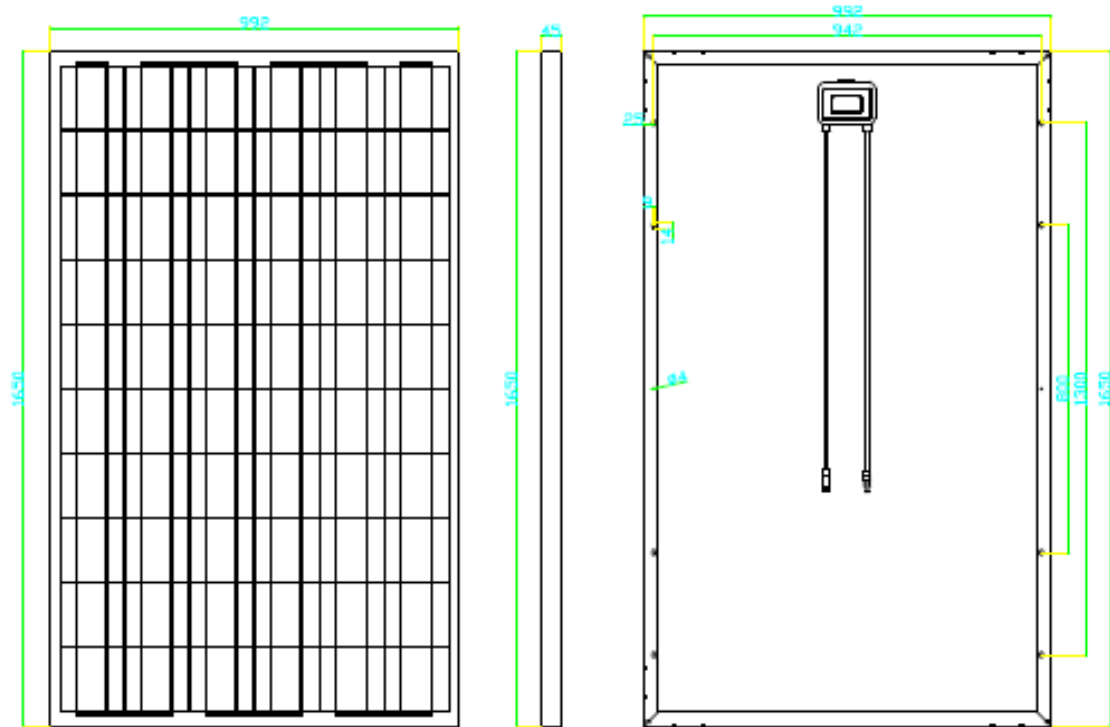

SHENZHEN SUOYANG NEW ENERGY CO.,LTD.

ADD.: No.5 Building, Juhui Mold Industrial area, Tianliao Road, Guangming New District, Shenzhen, China

Tel: +86- 755 3369 9191

Fax: +86-755 3369 9194

