


SPECIFICATION OF

20W AMORPHOUSE SILICON SOLAR MODULE

Maximum power (Wp)	20W
Maximum power voltage (V)	23
Maximum power current (A)	0.86
Open circuit voltage (V)	30
Short circuit current (A)	1.03
Size of module (mm)	1250*323*25
P-I-N Junction	double junction
Maximum system voltage (V)	1000V
Temperature coefficients of Isc (%)	+0.09/°C
Temperature coefficients of Voc (%)	-0.33/°C
Temperature coefficients of Pm (%)	-0.22/°C
Temperature Range	-40°C to +85°C
Weight per piece (kg)	9.5
Junction Box	Waterproof, TUV certificated
Cell Efficiency (%)	7%
Watt tolerance(%)	±3%
Encapsulant	EVA(Ethylene Vinyl Acetate)
Frame (Material, Corners, etc.)	Anodized Aluminum Alloy
Frant glass	3.2mm annealed glass
Back side	Float Glass
Frame (Material, Corners, etc.)	frame
Standard Test Conditions	AM1.5 100MW/cm ² 25 °C
Warranty	90% power for 10years, 80% power for 20 years.

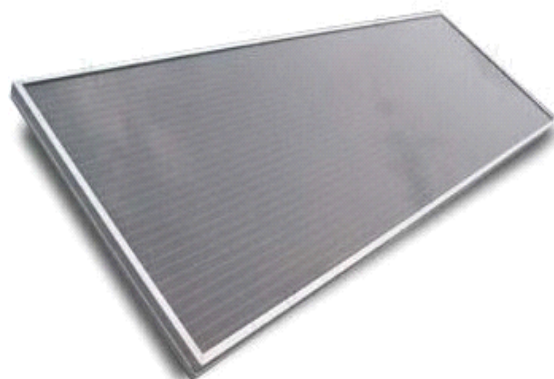

深圳市索阳新能源科技有限公司

SHENZHEN SUOYANG NEW ENERGY CO.,LTD

F5,No.A3,XinJianxing S&T Industrial Park,Fengxin Road,
Gongming Office,Guangming New District,Shenzhen

Tel: +86-755-3369 9191 Fax: +86-755-3369 9194

www.szsuoyang.com Email:service@szsuoyang.com

